


**VILLAGE OF VERNON HILLS
EXHIBIT NO. 1**

TYPICAL TRENCH AND STANDARD BEDDING

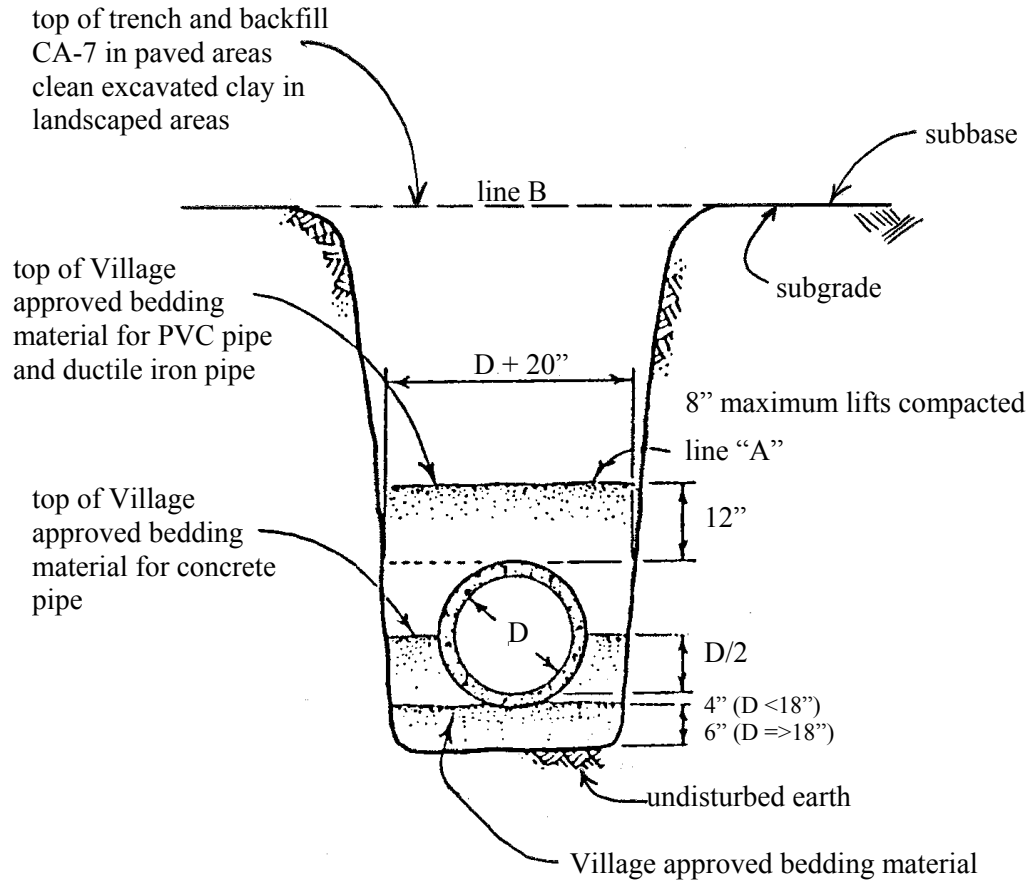

Notes:

1. Village approved bedding material for non-plastic pipe shall be well compacted crushed limestone, CA7 gradation.
2. Village approved bedding material for plastic pipe shall conform ASTM D2321, Class II non-angular aggregate except the maximum size shall be ½ inch, #6 washed stone.
3. No jetting will be allowed between November 15th and April 1st.
4. Voids left by sheeting shall be filled with standard bedding materials as the sheeting is removed.
5. All clay caps over storm sewer trenches within paved areas shall be exposed and additional trench and backfill added, if necessary, before subbase placement.