




PLAN VIEW

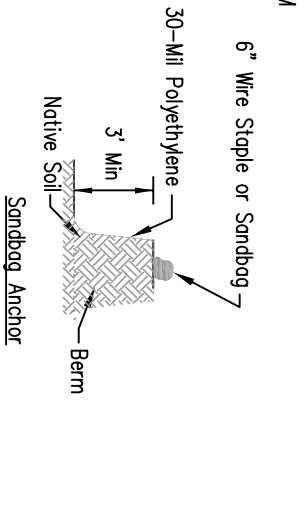

EARTHEN BERM ANCHOR SECTIONS

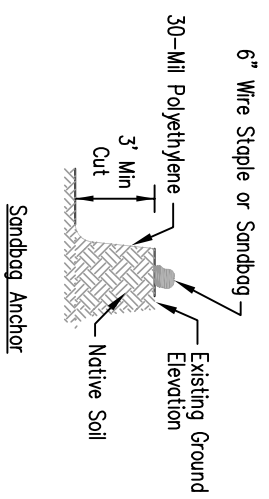

SUBGRADE ANCHOR SECTIONS

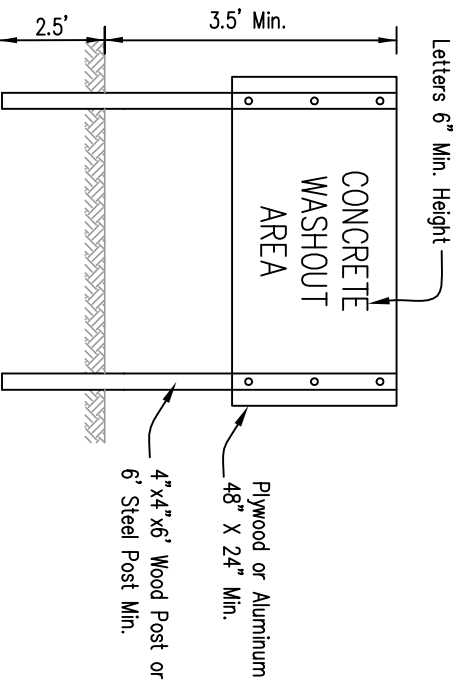

SIGN DETAIL

NOTES:

1. Maintaining temporary concrete washout facilities shall include removing and disposing of hardend concrete and/or slurry and returning the facilities to a functional condition.
2. Facility shall be cleaned or reconstructed in a new area once washout becomes two-thirds full.

Sheet 2 of 3	Drawing No. JUM-954FT	TEMPORARY CONCRETE WASHOUT FACILITY – EARTHEN TYPE	Defined _____ Drawn E. JOHNSON Checked _____ Approved _____
		Date	6/08